


MAGNE-COUPLE

Series 5527

- Magnet holding force is 16 lbs.
- Rugged Assembly for most applications
- Measures temperature from any ferrous surface
- Capable of use to 1000°F (535°C) without degradation
- The powerful Alnico Magnet forces the spring loaded sensing tip into contact with the sensor surface
- 1" Magnet diameter

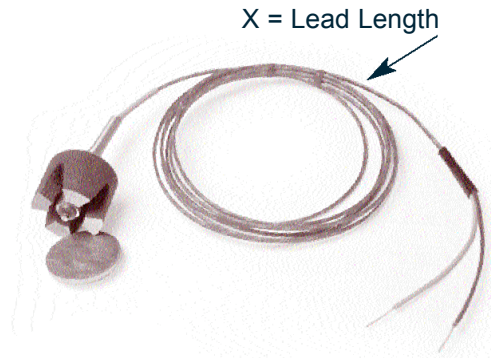

Examples 5527 - - - - -

5527 - - - - -

CODE	WIRE CALIBRATION
J	Iron/ Constantan
K	Chromel/Alumel
T	Copper/ Constantan
E	Chromel/Constantan
Consult factory for other calibrations	
LEAD LENGTH "X"	
Specify in inches 01 to 99	
72 inches is standard	
CODE	LEAD WIRE
10	Fiberglass (Standard)
1S	Fiberglass with SS Overbraid
20	Teflon
2S	Teflon with SS Overbraid
2F	Teflon with SS Flexhose
CODE	TERMINATION STYLE
10	111 Standard Plug
20	131 Mini Plug
40	3" Pig Tail
3" Pig Tail is Standard	
CODE	OTHER PERTINENT DATA
0	NONE
999	Special Lead Length Consult Factory

!

Metric Orders Welcome

Place an **mm** in the appropriate selection box:

100 mm