




Thermo-Couple Products Co.

INJECTION MOLDING THERMOCOUPLE

Series 5522

- Compression Type Thermocouples for Injection Molding Applications
- 304 Stainless Steel Sheath
- 1/8" NPT Brass Male Adapter is Supplied.
- All Stainless Construction with Fiberglass Insulated Wire
- 800°F Maximum Operating Temperature.

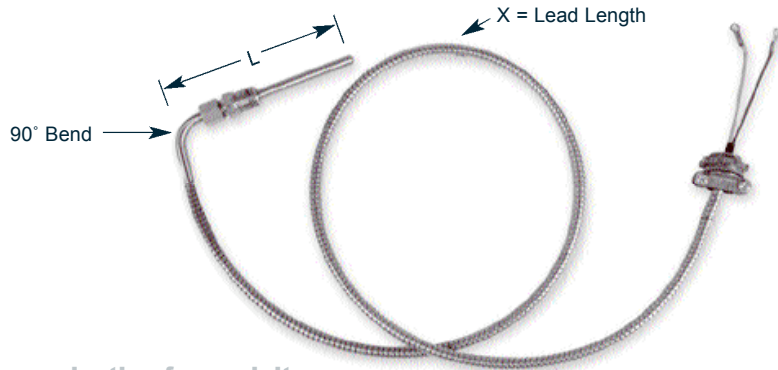

Enter a selection for each item, please fax your inquiry to TCP.

Example: 5522 - J - D - 6 - 30 - W1 - 10 - 0

5522 - - - - - - -

CODE	WIRE CALIBRATION
J	Iron/Constantan
K	Chromel/Alumel
T	Copper/ Constantan
E	Chromel/Constantan

CODE	SHEATH DIAMETER
D	.125"
E	.187"
Consult factory for other diameters	

IMMERSION LENGTH "L"
Specify in inches 01 to 99. For lengths over 99 inches consult factory.

CODE	OTHER PERTINENT DATA
0	NONE
999	Special Request Consult Factory

CODE	TERMINATION STYLE
10	111 Standard Plug
20	131 Mini Plug
41	3" Pig Tail, #6 Ring Terminal, 1/2" BX Connector
Code 41 is standard	

CODE	JUNCTION STYLE
W1	Grounded Flat Tip
W3	Ungrounded Tip
Code W1 is standard	

LEAD LENGTH "X"
Specify in whole inches 01 to 99

!	Metric Orders Welcome
	Place an mm in the appropriate selection box: <input style="width: 50px;" type="text" value="100 mm"/>