

Thermo-Couple Products Co.

www.tcproducts.com


a division of Marsh Bellofram
www.marshbellofram.com
1-800-727-5646

Plastic Industry

INJECTION MOLDING THERMOCOUPLE

Series 5520

- Compression Type Thermocouples for Injection Molding Applications
- 304 Stainless Steel Sheath
- 1/8" NPT Brass Male Adapter is Supplied Standard.
- All Stainless Construction with Fiberglass Insulated Wire
- 800°F Maximum Operating Temperature.

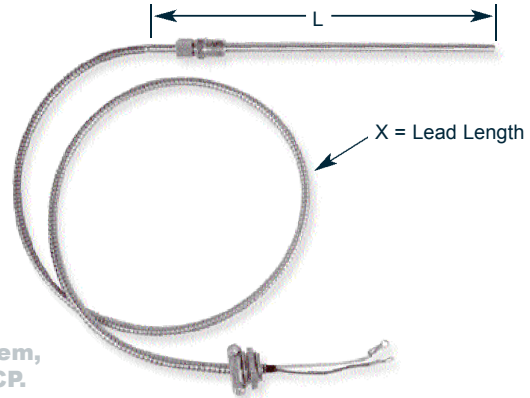

Enter a selection for each item, please fax your inquiry to TCP.

Example: 5520 - J - D - 6 - 24 - W1 - 10 - 0

5520 - - - - - - -

CODE	WIRE CALIBRATION
J	Iron/Constantan
K	Chromel/Alumel
T	Copper/ Constantan
E	Chromel/Constantan

CODE	SHEATH DIAMETER
D	.125"
E	.187"
Consult factory for other diameters	

IMMERSION LENGTH "L"
Specify in inches 01 to 99. For lengths over 99 inches consult factory.

CODE	OTHER PERTINENT DATA
0	NONE
999	Special Request Consult Factory

CODE	TERMINATION STYLE
10	111 Standard Plug
20	131 Mini Plug
41	3" Pig Tail, #6 Ring Terminal, 1/2" BX Connector
Code 41 is standard	

CODE	JUNCTION STYLE
W1	Grounded Flat Tip
W3	Ungrounded Tip
Code W1 code is standard	

LEAD LENGTH "X"
Specify in whole inches 01 to 99

Metric Orders Welcome

Place an **mm** in the appropriate selection box: